


# Let's Sew!

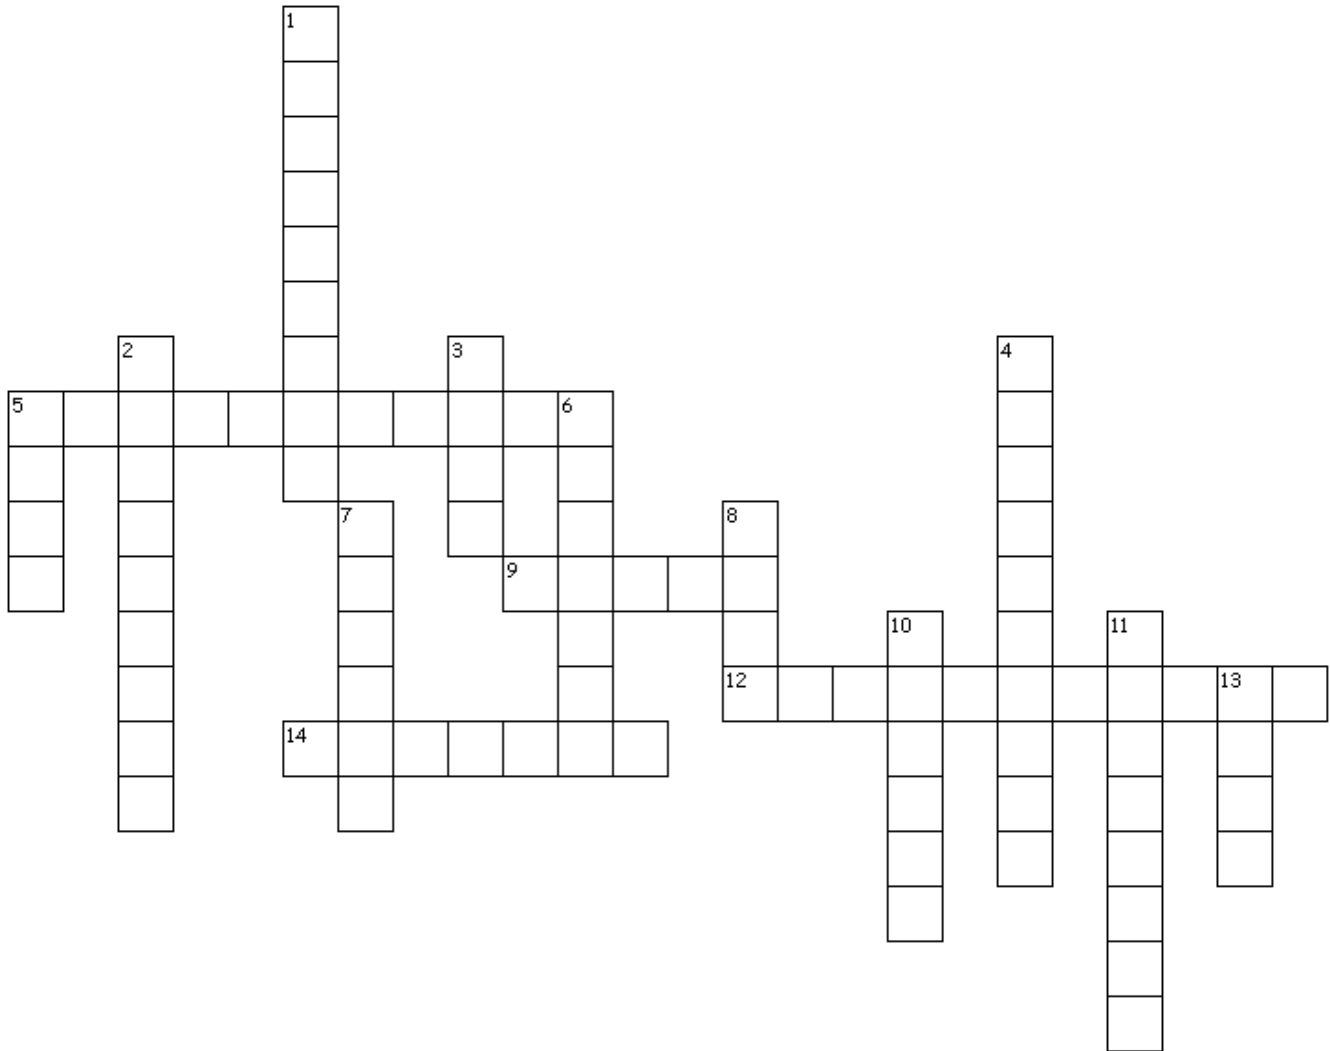

## Across

5. Part of the sewing machine that can be lowered down to hold fabric in place when sewing.
9. Ruler for measuring the seam or fold line of sewing project.
12. Silver knob that moves down to take thread from spool pin and moves up as stitch line is complete.
14. Take-up lever must be at the \_\_\_\_ position BEFORE sewing and AFTER sewing.

## Down

1. Device at the right side of sewing machine that rises up or lowers needles and raises or lowers take-up lever.
2. Watch the \_\_\_\_ on the metal / needle plate when you sew to produce an even straight stitching line.
3. The presser foot must always be in the \_\_\_\_ position in order to hold the fabric securely.
4. Equipment use to remove stitches.
5. Hold fabric before sewing.
6. Hand wheel must be turned \_\_\_\_ yourself.
7. Small thread holder to be placed in the sewing machine.
8. Keep the majority of the fabric to the left of the needle when sewing.
10. Always lower the presser foot \_\_\_\_ using the presser foot lifter.
11. Device under the presser foot to move the fabric along.
13. Always maintain a slow, \_\_\_\_ speed when using the foot pedal.

## KEY!

**Seam ripper** Equipment use to remove stitches.

**Pins** Hold fabric before sewing.

**Presser foot** Part of the sewing machine that can be lowered down to hold fabric in place when sewing.

**Bobbin** Small thread holder to be placed in the sewing machine.

**Gauge** Ruler for measuring the seam or fold line of sewing project.

**Feed dogs** Device under the presser foot to move the fabric along.

**Hand wheel** Device at the right side of sewing machine that raises up or lowers needles and raises or lowers take-up lever.

**Towards** Hand wheel must be turned \_\_\_\_\_ yourself.

**Take up lever** Silver knob that moves down to take thread from spool pin and moves up as stitch line is complete.

**Highest** Take-up lever must be at the \_\_\_\_\_ position BEFORE sewing and AFTER sewing.

**Even** Always maintain a slow, \_\_\_\_\_ speed when using the foot pedal.

**Down** The presser foot must always be in the \_\_\_\_\_ position in order to hold the fabric securely.


**Left** Keep the majority of the fabric to the left of the needle when sewing.

**Seam guide** Watch the \_\_\_\_\_ on the metal / needle plate when you sew to produce an even straight stitching line.

**Gently** Always lower the presser foot \_\_\_\_\_ using the presser foot lifter.



©NL shop \* [illustrationsOf.com/57976](https://illustrationsOf.com/57976)

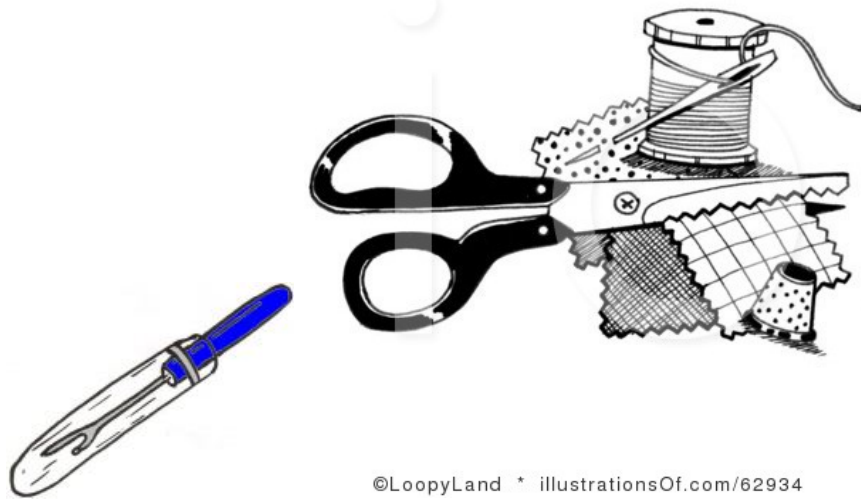

©LoopyLand \* [illustrationsOf.com/62934](https://illustrationsOf.com/62934)